


Type	Tufted non filled synthetic grass carpet	
Material	PP Fibrillated curled (UV Stabilized)	
Yarn type	4.400 / 2 dTex PP fibrillated curled	
Yarn quality	Environmental friendly, free of lead and cadmium	
Primary backing	100% PP black with fleece, UV Stabilized, Weight: 135 gr/m ²	
Secondary backing	Black Latex compound with a base of styrenebutadiene (SBR), Weight: 570 gr/m ²	
Water permeability	60 liter/min/m ²	
Pile height	7,5 mm	± 2 mm
Face weight	780 gr/m ²	± 10%
Total weight	1.485 gr/m ²	± 10%
Tuft gauge	5/32 gauge	
Stitches per 10 cm linear	33	± 1%
Stitches per m²	83.160	± 10%
Colour	#170 Teaklook	
UV stability	Meets DIN 53387 Standard (6000 hours)	
Colour fastness	Xenon Test: Blue Scale > 7, Grey-scale > 4	
Fire Classification	Efl	
Colour lining	Not Applicable	
Roll width	400 cm	
Roll length	20-25m	
Applications	Decorative, (Door)mat, Outdoor-Rug, Ship Decks, Terraces	
Comments	Project with multiple rolls: Before installation make sure the rolls are from the same production code (first 9 digits of the roll number). If you have any questions or doubts, please contact customer service.	

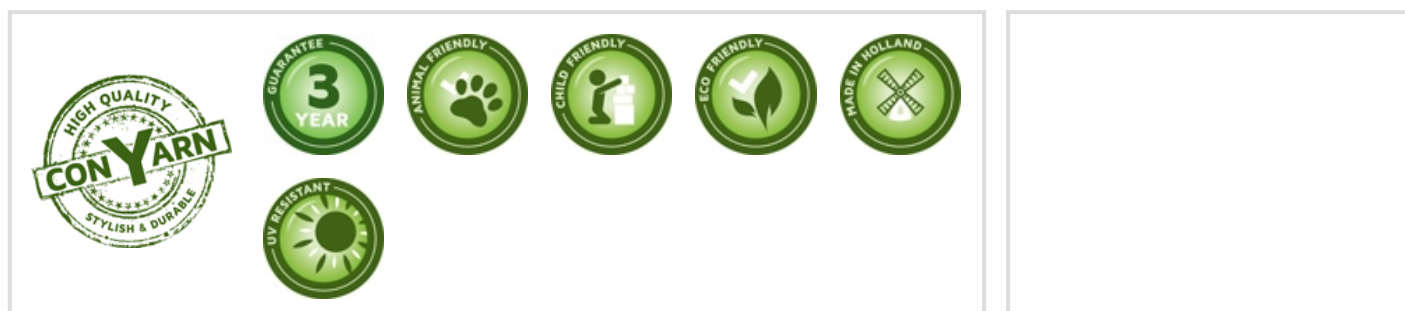

Condor Grass has the right to alter each product specification in order to improve the carpet according to the newest technological applications. Condor Grass is not legally liable in case of non-compliance with the above mentioned specifications. The above mentioned specifications are for reference, and can only be used informal.

The appearance of the final artificial grass carpet may change when it reaches temperatures beyond 75°C.